

NVR1825-HDA

1 Bay Commercial Network Video Recorder



Features

High-performance

- Up to 4 x 1080p@30fps video decoding capability
- Up to 16 channels and 1080p supported
- Up to 80Mbps incoming bandwidth
- Up to 64Mbps output bandwidth

Small size

- 1.6Kg / 3.52lb
- 350 x 240 x 40mm / 13.78" x 9.45" x 1.57"

Easy to install

- Automatic network organizing
- Built-in DHCP server

High reliability


- Embedded Linux
- Low power consumption
- Supports Packet Loss Recovery (PLR)

Abundant functions and features

- HDMI/VGA simultaneously output different content (-16HDA)
- E-Map, TV-Wall supported
- Bi-directional audio, Broadcasting
- NAT, Socks5
- Alarm management
- Free CMS (NVR Station), supports 128 NVR simultaneously
- CMS supports 6 screens simultaneously (4 x Live viewing, 1 x E-Map, 1 x TV-Wall)

Dimensions

Units:mm

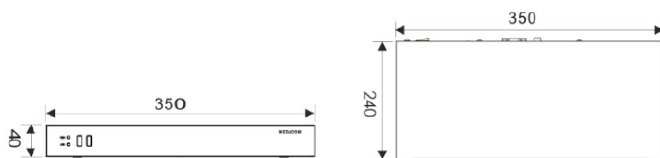

Specifications

	NVR1825-4HDA	NVR1825-9HDA	NVR1825-16HDA
Video/Audio Input			
IP Camera Input	4 channel	9 channel	16 channel
Resolution	1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF		
Compression	H.264		
Protocols	Onvif, RTSP, KEDACOM		
Incoming Bandwidth	20Mbps	45Mbps	80Mbps
Live Viewing			
Local Display	1 x HDMI, 1 x VGA, simultaneously output same content		1 x HDMI, 1 x VGA, simultaneously output different content
Multi Screen Display Local monitor	1, 4	1, 4, 9, 1+4, 1+8	Main / Secondary: 1/1, 4/1, 9/1, 15/1, 16/1 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9
Multi Screen Display Client	up to 4 screen simultaneously: 1, 3, 4, 9, 12, 16, 20, 25, 30, 36, 42, 49, 56, 63, 64 1+5, 1+7, 1+8, 1+9, 1+11, 1+15, 1+16, 1+33, 1+47, 1+48		
E-Map Function	Live Viewing in E-Map (NVR Station) E-PTZ / Scheme / Polling / TV-Wall (optional with decoder)		
Recording			
Resolution	1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF		
Mode	Manual / Continuous / Schedule / Event (Pre / Post)		
Event Trigger	Supported		
Tag	Supported		
Search & Playback			
Search Mode	Date and time (Calendar) / Event		
Resolution	1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF		
Playback (Local Monitor)	1 x 1080p@30fps / 4 x 720p@30fps	1 x 1080p@30fps / 4 x 720p@30fps	4 x 1080p@30fps
Playback (Client)	2 x 1080p@30fps	4 x 1080p@30fps	5 x 1080p@30fps
Synchronize Playback (Local Monitor)	4 x 720p@30fps	4 x 720p@30fps	4 x 1080p@30fps
Synchronize Playback (Client)	2 x 1080p@30fps	4 x 1080p@30fps	4 x 1080p@30fps
Function	Slow forward / Fast forward / Loop / Single frame / E-PTZ		
Storage			
Max. Internal HDDs	1 x 3.5" HDD Max. 6TB (up to 6TB/each)		
Audio			
Compression	G.711a / G.711u / ADPCM / G.722 / G.722.1c / AAC-LC		
Bit rate	32kbps ~ 64kbps		
Audio Function	Bi-directional audio / Dumb / Mute / Broadcasting		
Alarm			
Service Alarm Triggers	Alarm input / Video lost / Motion detection / Tampering / Guard line / Defocus / Sence change / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge		
System Alarm Triggers	Device disconnected / No disk / Disk error / IP Address conflict / Network disconnected / Low speed / Insufficient recording space / MAC address conflict / Insufficient snapshot space		
Alarm Events	Snapshot / Recording / PTZ preset / Buzzer / Email / Link to Client / Alarm caption / Live view in first window / Link to TV Wall / Link to secondary screen / Full screen viewing		
System			
Operating System	Embedded Linux		
User Management	Admin / User		
Log Management	User login / User operation / Alarm / Backup / Update		
Application Programming	NVR Station SDK		
Network			
Network Protocols	TCP/IP, UDP, HTTP, DHCP, DNS/DDNS, RTP/RTCP, RTSP, PPPoE, FTP, SNTp, VSIP, UPNP, SMTP, IPv4, IPv6 (optional)		
Viewer Software	CMS (NVR Station) / Web / iOS app / Android app		
Max. User Access	64 Users		
Output Bandwidth	36Mbps	10 ~ 36Mbps	64Mbps
Function	NAT / Socks5 / Multiple network access / Packet loss recovery / Auto network organizing		
Network Test	Supported		
Interfaces			
Ethernet	1 x 10/100M, RJ45 interface		1 x Gigabite network port, RJ45 interface
Video Out	1 x HDMI (up to 1920 x 1080@60Hz) 1 x VGA (up to 1920 x 1080@60Hz)		
Audio In / Out	1 x RCA Line in / 1 x RCA Line out		
USB	2 x USB 2.0		
Environmental			
Operating Temperature	-10°C ~ 55°C / 14°F ~ 131°F		
Operating Humidity	10% ~ 90%		
Electrical			
Power	12V DC ± 10%		
Power Consumption	Max. 20W (HDD not included)		
Mechanical			
Weight	1.6kg / 3.52lb (HDD not included)		
Dimensions	350 x 240 x 40mm / 13.78" x 9.45" x 1.57"		